


ISM Transceiver PAN2355



(Module without shielding)

OUTLINES - ENW59611N3A

This extremely compact and high-functionality module is mainly intended for the ISM (Industrial, Scientific and Medical) frequency bands at 868 and 915 MHz. Other frequency bands are possible on request. It provides a wireless radio transceiver and can be linked to a wide range of devices including home appliances, keyless entry and many other applications through SPI or UART.

Programming of the vast functionalities of the transceiver are done via SPI. The PAN2355 is made for all applications where a wide band bidirectional data transfer with high speed is needed.

It is focused on small size with a 8.0x8.2mm footprint and very low power consumption for battery driven applications.

FEATURES

- Programmable data rate up to 500 kbaud (NRZ mode)
- Very low current consumption
- Frequency range 300 - 1000 MHz
- High sensitivity (typ. -100 dBm at 2.4 kbaud, Manchester)
- Programmable output power -30 dBm to +10 dBm
- Low supply voltage (2.1 V to 3.6 V)
- Operating temperature range -40°C to +85°C
- Small size (8.0mm x 8.2mm x 1.9mm) incl. shielding
- Digital RSSI output
- Single port 50 Ω antenna connection
- Programmable frequency in 400 Hz steps makes crystal temperature drift compensation possible

APPLICATIONS

- RKE - Two-way Remote Keyless Entry
- Home Automation Systems
- AMR - Automatic Meter Reading
- Low Power Telemetry
- Toys
- Remote Control Systems

MODULES
Panasonic Electronic Devices (Europe) GmbH
WIRELESS
M

Dipl.-Ing.

Heino Kähler

Manager
Module Business


Panasonic Electronic Devices Europe GmbH
Zeppelinstrasse 19
21337 Lüneburg, Germany

Tel. (49)-4131-899-304

Fax (49)-4131-899-177

Heino.Kaehler@eu.panasonic.com

DIMENSIONS

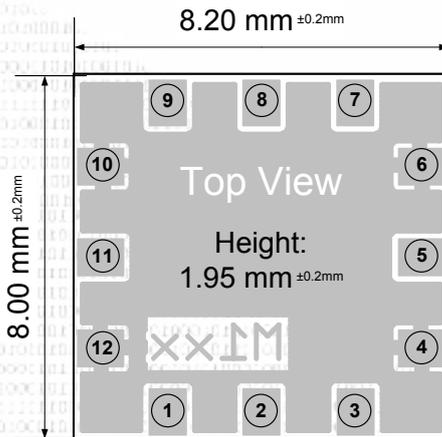

Pin no.	Pin name
4,6,10,12	GND
1	SPI SI
2	SPI SCLK
3	SPI SO
5	GDO 0
7	SPI CSN
8	Vcc
9	GDO 2
11	50 Ω RF

TECHNICAL CHARACTERISTICS

Parameter	Value	Condition / Note
Receiver Sensitivity, at 2.4 kbps, 2-FSK at 250 kbps, 2-FSK	-100 dBm -85 dBm	more details in datasheet
Output Power	-30 to 10 dBm	Delivered to 50 Ω load. The output power is programmable.
RSSI dynamic range	-136 to -8 dBm	
PLL lock time (Rx /Tx turn time)	10 μs	for 1x IF frequency step
PLL turn-on time, crystal oscillator on in power down mode	80 μs	Crystal oscillator running
Power Down Mode	900 nA typ.	Standby with WOR enabled
Current Consumption receive mode @2.4 kbps	14.2 mA typ.	Current is programmable and can be increased for improved sensitivity
Current Consumption transmit mode P=3mW (5dBm)	19.7 mA typ.	Delivered to 50 Ω load.

Note:

All parameters are valid for $V_{CC} = 3.0\text{V}$, $T_{amb} = 25^\circ\text{C}$ and 868MHz

Maximum output power is 10dBm, please check data sheet hints to pass EN300220 requirements.

All other frequencies, e.g. 315MHz, 433MHz and 915MHz are also available on request.